

USERTIPS DOROCUTTER



Sidemounted reedcutters pull the boat sideways. This is compensated if the boatengine is mounted a little bit to the right.



The gunwalehook squeeze the frames stuck from the underside of the gunwale. All frames are telescopic to suit different boatwidths.



The steering qualities are improved if the boat is ballasted. The stability of the boat is also preserved.

Some suggestions of how to work effective with the Dorocutters:

Plan the cutting so that you have the wind as an aid in your work. Choose days when the wind blows towards land. An opening can be cut from land and out. When you cut from the outside, you can use the rake and steer the reed to the opening, and it drifts ashore by it self. Always take care of the cut plants. If they are left in the water they can get rooted again. It affects the animal and plant life in the long run if the reed is left in the water. To root out or minimize the waterplants, it is necessary to cut regularly. If the growth is kept under the watersurface, the best result is obtained, and the plant dies out.

The result depends on what type of plant it is. Our Dorocutters cut all types of waterplants.

NB! Stated cut deep in the tabel vary some depending of the length of the gunwale edge.

The Dorocutters are mounted on smaller boats. The mounting can be done by one person. The frame is put over the gunwale and then tightened with a gunwale hook. The cuttingknives are adapted for cutting under the watersurface. When we are using bearings which are greased by water, the Dorocutters only need a little maintenance. The cutting deep can be adjusted in steps of about 20 mm. The sidemounted Dorocutter can be mounted on an optional place if rowing is used instead of a boatengine.

Model	Engine	Driving	Workingwidth	Cutting depth	Rustprotection	Driving-speed	Rockreleaser	Weight
3070	Hyddo 200	Hydraulic motor	3,07 m	0,8 m	Galvanized/ Zink plating	0-70 m/min	yes	110 kg incl. hyd.unit.
Hymo	Hyddo 200	Hydraulic motor	1,5 m	1,5 m	Zink plating	0-70 m/min	yes	75 kg incl. hyd.unit.
Klippo	B&S 3,5 h.p 4-stroke	V-belt 4-step	1,5 m	0,5 m	Zink plating	0-70 m/min	yes	60 kg
Wasse	B&S 3,5 h.p 4-stroke	V-belt 4-step	1 m	0,3 m	Zink plating	0-70 m/min	yes	45 kg
Elis	24 v D.C engine	Mechanical gearing	0,75 m	0,3 m	Zink plating	0-50 m/min	yes	17 kg
Handy			0,40 m	Teleskopic, max length 2 m	Zink plated knife, Handle in aluminium			1,5 kg
Hyddo 200	B&S 6 h.p 4-stroke	Hydraulic pump	Hydraulic oil biodegradable		Aluminium			45 kg

For more information, order our cd-presentation or visit our homepage:

www.doroteamekaniska.se

Manufacturing/sale

DOROTEA MEKANISKA AB

Järnvägsgatan 50, 917 31 Dorotea, Sweden

Phone +46(0)942-106 41, Fax +46(0)942-106 44

E-mail: info@doroteamekaniska.se

Homepage: www.doroteamekaniska.se

The right to change technical specifications is reserved the manufacturer

SPECIAL MASKINER A/S



Haveskovvej 42 • DK-5932 Humble • Tlf. +45 62 56 16 67
Fax +45 62 56 16 07 • CVR/SE-nr. 31481945 • www.special-maskiner.com

Dorocutters



DOROCUTTER 3070



DOROCUTTER HYMO




DOROCUTTER KLIPPO



DOROCUTTER WASSE

Rinse around your bridge and make it possible to fully use your site bordering to the lake. With five engine driven models to choose between, it is easy to find a reedcutter for your needs. The userfriendly Dorocutters are mounted on smaller boats and can be completed with belonging reed rake. You get a complete concept for reed cutting and gathering. We also offer a useful handtool, Doroknife Handy, for cutting of reed close to land and bridges.

DOROCUTTER 3070

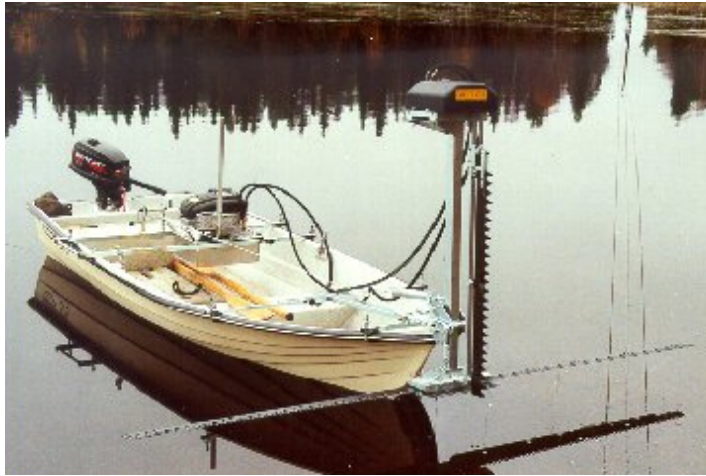

Dorocutter Mod 3070 is our largest reedcutter for motorboats. The hydraulical driving gives a reliable drift. The machine is suitable for the larger jobs. An engine on the high side of 6 hp is delivering power to the cutting unit.

The **Dorocutter Mod 3070** is delivered complete with frames, winch, hydraulic unit (**Hyddo 200**) and cutting unit with a working width of 3 metres. The knives are changeable with alternative working widths, 2 and 4 metres. The rock releaser is springing. The construction allows the knife to move sideways and backward.

Item no. 95-3070H

DOROCUTTER HYMO



The **Dorocutter Hymo** is our deepcutting machine. Our hydraulic unit **Hyddo 200** is used as source of energy. The machine is very reliable because of the hydraulic drift. The **Dorocutter Hymo** is delivered complete with the hydraulic unit. Rock releaser is standard.


Item no. 87-HYMO



Frontmounted Reed rake

A frontmounted reed rake to use together with the **Dorocutter Mod 3070**. The reed rake makes the **Dorocutter** complete and the cutting can be done more effectively when the rake takes care of the cut reed.

Item no. 95-12000

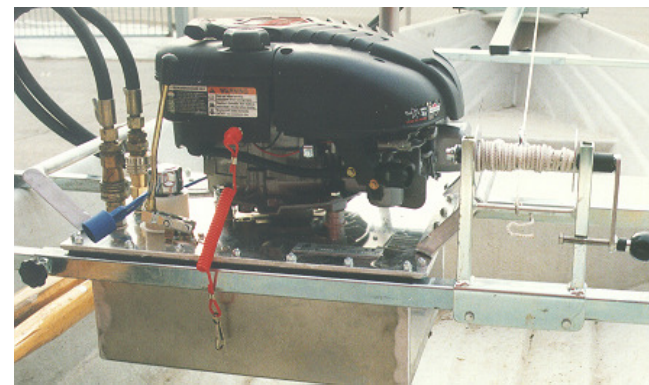

Hyddo 200 is mounted as a separate unit and is simply removed. The exhausts are lead via a lengthened exhaustpipe away from the drivers seat. All hydraulical components are built into the tank so that oil spill are avoided. The engine can be started from the drivers seat. **Hyddo 200** is used for drift of **Mod 3070** and **Hymo**. **Hyddo 200** can also be delivered for drift of other hydraulic machines.



The **Dorocutters** can be used effectively with the **Reedrake**. The reed that sometimes disturb the propeller is steered away with the rake. The rake is used together with **Hymo**, **Klippo**, **Wasse** och **Elis**.

Item no. 96-VASSRÄFSA

DOROCUTTER KLIPPO



The **Dorocutter Klippo** is a machine in the middle class. All maneuvering of **Klippo** is done from the drivers seat, like deep-going and the drift of the knife. The knife can be angled for cutting in blanket of plants and cutting close to land. **Klippo** is equipped with rockreleasing and has an adjustable frame for different boatwidths. The plasticbuckets work as a counterweight (ballast). The frame is tightened against the gunwale with hooks.

Item no. 88-KLIPPO

A wheelrack for **Klippo** makes transport, mounting and storing easy. Heavy lifts are avoided at mounting with a wheelrack. Sold as an accessory. Item no. 99-HJUL



DOROCUTTER ELIS



The **Dorocutter Elis** is our electrical driven reedcutter. **Elis** is the suitable machine when smaller water-areas are maintained (up to about 2000 square metres). The light construction makes transport and mounting very easy. **Elis** is delivered with a connecting cable and battery clips. Two 12 volt batteries are used as source of energy which are connected in series to 24 volts tension. 2x28 Ampere gives about 100 minutes time to drive easy cutting. Easy cutting means an area that is cut before (cutting for maintenance). Reed-rake, batteries and battery charger are delivered as accessories.

Dorocutter Elis
Battery set 2x28Ah.

Item no. 81-EL
Item no. 81-28AH

DOROCUTTER WASSE



The **Dorocutter Wasse** is our smallest engine powered reedcutter. **Wasse** is the suitable reedcutter when small areas and different watersystems are maintained. The cutting deep, the drift of the knife, start and stop of the engine etc. are done from the drivers seat. The light construction makes transport and mounting easy. Rockreleaser is standard. The reed-rake is delivered as an accessory.

Item no. 93-WASSE

A wheelrack for **Wasse** makes transport, mounting and storing easy. Fourstroke engines should be stored standing to avoid that oil rins in to the cylinder. Are sold as an accessory. Item no. 93-HJUL



DOROKNIFE HANDY



Doroknife Handy with double function, cuttingblade and rake. Perfect tool for cleaning of small surfaces. **Doroknife Handy** has a telescopic shaft. The knives are changeable.

Item no. 97-HANDY